



QUICKLOK

SPEAKER&
lighting stands



QUIK LOK'S HEIGHT ADJUSTABLE ALL-STEEL NEAR-FIELD MONITOR STANDS

- Perfect for home, project or professional recording studios
- All-steel, arc welded construction - NO fibre or chipboard
- Attractive design incorporating cable management
- Solid triangular base with adjustable levelling floor spikes
- Sturdy metal top plate provides steady and safe support
- Available in scratch-resistant, baked-on, non reflective, black enamel finish



BS/300

- Height Adjustable Near-Field Monitor Stand

| | |
|---------------------------|--|
| Speaker plate dimensions: | 9" square 23 cm square |
| Height Positions (5): | 32.7", 36", 39", 42", 45.3" 83, 91, 99, 107, 115 cm |
| Base Size: | 17.7" square 45 cm square |
| Weight capacity: | 125 lb - 57 kg |
| Weight: | 10.6 lb - 4.8 kg |
| Color: | Black |

BS/402

- Height Adjustable Near-Field Monitor Stand

| | |
|---------------------------|--|
| Speaker plate dimensions: | 9" square 23 cm square |
| Height Positions (5): | 30.7", 34", 37.4", 40.7", 44" 78, 86.5, 95, 103.5, 112 cm |
| Base Size: | 14.5" x 16.1" 37 x 41 cm |
| Weight capacity: | 125 lb - 57 kg |
| Weight: | 11.1 lb - 5 kg |
| Color: | Black |



BS/500 SERIES OF FIXED-HEIGHT ALL-STEEL NEAR-FIELD MONITOR STANDS

- Perfect for home, project or professional recording studios.
- All-steel, arc welded construction - NO fibre or chipboard.
- Attractive design incorporating cable management clips.
- Solid steel base with adjustable levelling floor spikes.
- Sturdy metal top plate, equipped with rubber foam strips, provides steady and safe support.
- Vertical columns can be sand loaded to deaden sound and increase stability.
- Available in scratch-resistant, baked-on, black enamel finish.

BS/536


36" (91 cm) Fixed Height
Near-Field Monitor / Speaker Stand

Speaker plate dimensions: 11" square
28 cm square
Fixed Height: 36" - 91,4 cm
Diameter of base spread: 19.8" - 50,3 cm
Weight capacity: 125 lb - 57 kg
Weight: 10 lb - 4.5 kg
Color: Black

BS/542

42" (106 cm) Fixed Height
Near-Field Monitor / Speaker Stand

Speaker plate dimensions: 11" square
28 cm square
Fixed Height: 42" - 106,7 cm
Diameter of base spread: 19.8" - 50,3 cm
Weight capacity: 125 lb - 57 kg
Weight: 11.1 lb - 5 kg
Color: Black

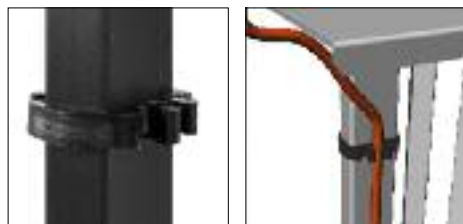

Details of cable management of BS/536 and BS/542 monitor stands



BS/543

24" (60 cm) Fixed Height
Near-Field Monitor / Speaker Stand with cable management steel channel

Speaker plate dimensions: 8.6" x 6.5"
220 x 165 mm
Base Size: 10" square
25 cm square
Fixed Height: 24" - 60 cm
Weight capacity: 125 lb - 57 kg
Weight: 12.6 lb - 5.7 kg
Color: Glossy Black



BS/544

32" (80 cm) Fixed Height
Near-Field Monitor / Speaker Stand with cable management steel channel

Speaker plate dimensions: 8.6" x 6.5"
220 x 165 mm
Base Size: 10" square
25 cm square
Fixed Height: 32" - 80 cm
Weight capacity: 125 lb - 57 kg
Weight: 14.9 lb - 6.7 kg
Color: Glossy Black



BS/545


40" (100 cm) Fixed Height
Near-Field Monitor / Speaker Stand with cable management steel channel

Speaker plate dimensions: 8.6" x 6.5"
220 x 165 mm
Base Size: 10" square
25 cm square
Fixed Height: 40" - 100 cm
Weight capacity: 125 lb - 57 kg
Weight: 16.6 lb - 7.5 kg
Color: Glossy Black



"X" STYLE SPEAKER/MONITOR STANDS**QL/322**

- Small "X" Styled Stereo Speaker Stand



QL/322 Height & width positions

| | |
|------------------|-----------------|
| Leg depth: | 9.75" - 24.8 cm |
| Tier depth: | 9.75" - 24.8 cm |
| Folded height: | 13.1" - 33.4 cm |
| Brace tube size: | 20 x 15 mm |
| Weight capacity: | 100 lb - 45 kg |
| Weight: | 3.1 lb - 1.4 kg |
| Color: | Black |

**BS/313**

- Small Tilt-Back Stereo Speaker Stand




| | |
|----------------------------|-----------------|
| Side to side width: | 10" - 25.4 cm |
| Front to back depth range: | 11.8" to 15" |
| | 30 to 38 cm |
| Front tier height range: | 8.25" to 11" |
| | 21 to 28 cm |
| Back tier height range: | 11.4" to 18.6" |
| | 29 to 47.2 cm |
| Brace tube size: | 20 x 15 mm |
| Tier tube diameter: | 28 mm |
| Weight capacity: | 75 lb - 33.9 kg |
| Weight: | 3.7 lb - 1.7 kg |
| Color: | Black |

**BS/619**

- Portable Speaker/Monitor "X" Stand with Collapsible Telescopic Tiers
- Securely holds medium-sized speaker cabinets in tilt-back or straight positions
- Used for side-fill or stage monitor applications
- Folds to compact size for easy transport
- 180 lb (81 Kg) weight capacity



| | |
|------------------------|------------------|
| Leg depth: | 19.5" - 49.5 cm |
| Tier depth: | 13.75" - 34.9 cm |
| Folded height: | 28" - 71 cm |
| Upper brace tube size: | 25 x 25 mm |
| Lower brace tube size: | 30 x 30 mm |
| Tier tube size: | 30 mm |
| Weight capacity: | 180 lb - 81 kg |
| Weight: | 9.5 lb - 4.3 kg |
| Color: | Black |



BS/619 Height & width positions

HEAVY DUTY “T” SPEAKER STANDS



- Designed for heavy speaker cabinets including trapezoidal designs
- Capable of holding speaker cabinets up to 300 lb (135 kg) total weight
- 8 different height adjustment positions
- Solid rubber rest pads hold speaker cabinets firmly in place
- Speaker cabinets can be stacked or placed side by side
- Fold down to convenient “T” for easy transport



WS/650

- Large, heavy duty multi-function “T” stand



| | |
|-----------------------|------------------------------------|
| Height positions (8): | 24.25" to 32.5" 61.6 to 81.3 cm |
| Usable width range: | 29.2" to 46.4" 74 to 118 cm |
| Usable depth range: | 17.3" to 27.4" 44 to 69.5 cm |
| Folded width: | 29.2" - 74 cm |
| Folded height: | 24.6" - 62.5 cm |
| Frame tubing size: | 30 x 30 mm |
| Weight Capacity: | 250 lb - 113.1 kg |
| Weight: | 18 lb - 8.1 kg |
| Color: | Black |

Options: WS/551, WS/552, WS/561, WS/562, WS/651, Z/714*, Z/727*, Z/729*, Z/730*, Z/733*, QLX/4**, QLX/5**, IPS/11**, IPS/13**, LPH/X**

* Note: can be used only in combination with WS/562 crossbar

** Note: can be used only in combination with WS/651 accessory clamp or Z/727 add-on tiers

WS/640

- Compact, heavy duty multifunction “T” stand

| | |
|-----------------------|------------------------------------|
| Height positions (8): | 24.25" to 32.5" 61.6 to 81.3 cm |
| Width range: | 17" to 26" 43.2 to 66 cm |
| Depth range: | 14" to 17.5" 35.6 to 44.5 cm |
| Frame tubing size: | 30 x 30 mm |
| Weight Capacity: | 300 lb - 135 kg |
| Weight: | 13.1 lb - 5.9 kg |
| Color: | Black |

Options: WS/551, WS/552, WS/651, QLX/4*, QLX/5*, IPS/11*, IPS/13*, LPH/X*

* Note: can be used only in combination with WS/651 accessory clamp




QUIK-LOK SPEAKER WALL MOUNTS

- Perfect for homes, stores, theaters, churches and all kinds commercial applications
- Heavy duty arc-welded steel construction
- Standardized mounting holes fit most popular speakers
- Tilt and swivel adjustable for exact directional positioning
- Non-reflective black enamel finish



QL/30

- Speaker Wall Mount with 2-Hole Speaker Plate and 2-Hole Wall Plate




Front to back depth: 4.75" - 12 cm
 Weight capacity: 30 lb - 14 kg
 Weight: 1.1 lb - 0.5 kg
 Color: Black



QL/30E

- Speaker Wall Mount with 4-Hole Speaker Plate and 2-Hole Wall Plate




Front to back depth: 4.75" - 12 cm
 Weight capacity: 30 lb - 14 kg
 Weight: 1.3 lb - 0.6 kg
 Color: Black



QL/60

- Speaker Wall Mount with 4-Hole Speaker Plate and 3-Hole Wall Plate



Front to back depth: 7.75" - 19.6 cm
 Weight capacity: 60 lb - 27 kg
 Weight: 3.1 lb - 1.4 kg
 Color: Black

QL/90

- Tilt adjustable speaker wall bracket for speaker cabinets with 1-3/8" (35 mm) mounting hole

| | |
|-----------------------------------|-----------------|
| Male connection size: | 1-3/8" - 35 mm |
| Distance from wall to connection: | 14.3" - 36.5 cm |
| Wall plate height: | 7.9" - 20 cm |
| Weight capacity: | 55.5 lb - 25 kg |
| Weight: | 3.1 lb - 1.4 kg |
| Color: | Black |



QL/95

- Heavy-duty tilt adjustable speaker wall bracket for heavy speaker cabinets with 1-3/8" (35 mm) mounting hole

| | |
|-----------------------------------|------------------|
| Male connection size: | 1-3/8" - 35 mm |
| Distance from wall to connection: | 11.8" - 30 cm |
| Wall plate height: | 7.5" - 19 cm |
| Weight capacity: | 133 lb - 60 kg |
| Weight: | 5.4 lb - 2.45 kg |
| Color: | Black |



SB/205

- Speaker wall mount

| | |
|-----------------------------------|-----------------|
| Male connection size: | 1-3/8" - 35 mm |
| Distance from wall to connection: | 17" - 43.5 cm |
| Height: | 18" - 46 cm |
| Weight capacity: | 90 lb - 40 kg |
| Weight: | 5.5 lb - 2.5 kg |
| Color: | Black |



ALUMINUM & STEEL SPEAKER STANDS WITH 1-3/8" (35 mm) CENTER TUBE

- Strong lightweight, portable design
- Steel safety pin and chain with snap lock holder on collar
- Supplied with nylon adapter for 38 mm (1.5") speaker cabinet mounts
- Available in anodized black finish
- Limited lifetime warranty

S/171

- Tripod speaker stand with aluminum center tube and steel legs for added strength.

| | |
|--------------------------|---------------------------------|
| Min to Max height range: | 42.9" to 80.7" 109 to 205 cm |
| Base spread diameter: | 24" to 47.2" 61 to 120 cm |
| Center tube diameter: | 1.375" - 35 mm |
| Folded height: | 42.2" - 107 cm |
| Weight capacity: | 100 lb - 45 kg |
| Weight: | 4.45 lb - 2 kg |
| Color: | Black |



The polycarbonate leg joint found on the S/171 provides a neat and elegant look to the stand, while ensuring maximum stability



Snap lock holder on height adjustment collar prevents the safety pin from scratching the tube's finish during transport



The 38 mm (1-1/2") add-on top plastic cap found on the S/171 allows to accommodate different standard speaker mounting seats.

S/171PAK

- Set of two S/171 tripod speaker stands and nylon carrying bag.



S/173

- Aluminum tripod speaker stand with 35/38 mm reversible tube

| | |
|--------------------------|---------------------------------|
| Min to Max height range: | 42.9" to 80.7" 109 to 205 cm |
| Base spread diameter: | 24" to 47.2" 61 to 120 cm |
| Center tube diameter: | 1-3/8" - 1-1/2" 35 - 38 mm |
| Folded height: | 41.2" - 105 cm |
| Weight capacity: | 100 lb - 45 kg |
| Weight: | 4.45 lb - 2.0 kg |
| Color: | Black |



The polycarbonate leg joint found on the S/173 & S/176 provides a neat and elegant look to the stand, while ensuring maximum stability



Snap lock holder on height adjustment collar prevents the safety pin from scratching the tube's finish during transport



The S/173 & S/176 feature a reversible 1-1/2" (38 mm) tube that accommodates 1-1/2" (38 mm) or 1-3/8" (35 mm) speaker mounts with no separate adapters

S/176

- Aluminum tripod speaker/lighting stand with 35/38 mm reversible tube

| | |
|--------------------------|---------------------------------|
| Min to max height range: | 6.1' to 10' 185 to 307 cm |
| Base spread diameter: | 48.8" to 60.6" 124 to 154 cm |
| Center tube diameter: | 1-3/8" - 1-1/2" 35 - 38 mm |
| Folded height: | 64.5" - 164 cm |
| Weight capacity: | 125 lb - 56.6 kg |
| Weight: | 8 lb - 3.6 kg |
| Color: | Black |

CB 6/2

- Nylon Tote Bag for two S/171, S/173 or SP/180 speaker stands



DELUXE ALUMINUM PNEUMATIC SPEAKER/LIGHTING STANDS WITH 1-3/8" (35 mm) CENTER TUBE

- Superior air-cushion design gently and safely lowers speaker cabinets eliminating sudden drops
- Non-strip out height adjustment and leg joint collar hardware with block tightening clamp assembly
- Heavy duty aluminium alloy leg joint provides strength and stability
- Strong lightweight, portable design
- Steel safety pin and chain with snap lock holder on collar
- Supplied with adapter for 38 mm (1.5") speaker cabinet mounts
- Available in silver satin or anodized black finishes
- Limited lifetime warranty



Superior air-cushion design gently and safely lowers speaker cabinets eliminating sudden drops

SP/180

- 6 ft (180 cm) Speaker Stand
Featuring air-cushion device



The 38 mm (1-1/2") add-on top plastic cap allows to accommodate different standard speaker mounting seats



Heavy duty aluminium alloy leg joint, with metal block tightening clamp assembly, provides strength and stability

| | |
|--------------------------|------------------------------|
| Min to max height range: | 48" to 72" 122 to 183 cm |
| Base spread diameter: | 38.5" to 60" 98 to 152 cm |
| Center tube diameter: | 1.375" 35 mm |
| Folded height: | 42.5" 108 cm |
| Weight capacity: | 125 lb - 56.6 kg |
| Weight: | 6.4 lb - 2.9 kg |
| Color: | Silver or Black |



Snap lock holder on height adjustment collar prevents the safety pin from scratching the tube's finish during transport



Sleek, modern design rubber feet will hold speaker stand firmly in place

SP/180BK PAK

- Set of two SP/180BK tripod speaker stands and nylon carrying bag.



| | |
|--------------------------|------------------------------|
| Min to max height range: | 48" to 72" 122 to 183 cm |
| Base spread diameter: | 38.5" to 60" 98 to 152 cm |
| Center tube diameter: | 1.375" 35 mm |
| Folded height: | 42.5" 108 cm |
| Weight capacity: | 125 lb - 56.6 kg |
| Weight: | 6.4 lb - 2.9 kg |
| Color: | Black |



SP/189

- 10 ft (300 cm) Speaker/Lighting Stand Featuring air-cushion device

| | |
|--------------------------|---------------------------------|
| Min to max height range: | 5.8' to 9.8' 175 to 296 cm |
| Base spread diameter: | 48.8" to 73.2" 124 to 186 cm |
| Center tube diameter: | 1.375" - 35 mm |
| Folded height: | 60.6" - 154 cm |
| Weight capacity: | 125 lb - 56.6 kg |
| Weight: | 8 lb - 3.6 kg |
| Color: | Silver or Black |



Heavy duty aluminium alloy leg joint, with metal block tightening clamp assembly, provides strength and stability



Snap lock holder on height adjustment collar prevents the safety pin from scratching the tube's finish during transport



SP/282 "EASY-LIFT" DELUXE ALUMINUM PNEUMATIC SPEAKER STAND WITH 1-3/8" (35 mm) CENTER TUBE

- Innovative "Easy-Lift" height adjustment device allows to raise your speaker cabinet EFFORTLESSLY!
- Superior air-cushion design gently and safely lowers speaker cabinets eliminating sudden drops.
- Non-strip out height adjustment collar and leg joint hardware with block tightening clamp assembly.
- Solid, robust polycarbonate leg joint and height adjustment collar provide strength and stability.
- Height adjustment collar houses a strong tightening knob to eliminate the least wobbling, and a self-engaging steel safety pin for added security. Simply press the collar lever to disengage pin and free the shaft.
- Strong lightweight, portable design.
- Supplied with adapter for 38 mm (1-1/2") speaker cabinet mounts.
- Available in silver satin or anodized black finishes.
- Limited lifetime warranty.



SP/282

- 6 ft (180 cm) Speaker Stand
Featuring Easy-Lift device and
Air-Cushion design

| | |
|--------------------------|------------------------------|
| Min to max height range: | 48" to 72" 122 to 183 cm |
| Base spread diameter: | 38.5" to 60" 98 to 152 cm |
| Center tube diameter: | 1.375" 35 mm |
| Folded height: | 42.5" 108 cm |
| Weight capacity: | 125 lb - 56.6 kg |
| Weight: | 6 lb - 2.7 kg |
| Color: | Silver or Black |



Height adjustment collar houses a strong tightening knob to eliminate the least wobbling, and a self-engaging steel safety pin for added security. Simply press the collar lever to disengage pin and free the shaft



The 38 mm (1-1/2") add-on top plastic cap allows to accommodate different standard speaker mounting seats



Solid, robust polycarbonate leg joint, with nylon block tightening clamp assembly, provides strength and stability



Sleek, modern design rubber feet will hold speaker stand firmly in place



The innovative "Easy-Lift" height adjustment device allows to raise your speaker cabinet **EFFORTLESSLY!** Place your speaker on the stand with the shaft at its lowest height position (a). Then start raising the shaft to the desired height (b): the steel security pin located in the height adjustment collar will self-engage every 4" (10 cm), locking the shaft in place and allowing you to pause, and then continue from there to the next height position, proceeding with lifting the speaker's weight in small, effortless increments. Once the safety pin catches the last position hole and the maximum stand height is reached, tighten the collar knob to eliminate the least wobbling (c).



To take down the speaker cabinet, simply press the collar lever to disengage the safety pin (d). Then, making sure not to be in the way of the speaker's descent, loosen the tightening knob to free the shaft (e). Quik Lok's superior air-cushion design will lower the speaker gently and safely, eliminating sudden drops (f).



DSP/390

- Universal Mount for LED flat screens, LCD displays and video monitors up to 40", built with VESA bolt pattern mounting standards.
- Designed for mounting of flat screen TV's on a floor stand, it easily mounts over the top of any speaker/lighting stand built using 35 mm diameter round tubing, and securely connects to it by means of a practical clamping device.
- Mounting plate features up-and down tilt adjustments (0°/+10°) and full side-to-side adjustment (360°).
- Manufactured using high-strength steel sheet metal.
- Includes all VESA hardware for fast and simple installation.

Plate dimensions:

VESA compliant:

Weight:

Weight capacity:

Color:

9" x 9"
23 x 23 cm
Including VESA
75x75mm
100x100mm
100 x 200mm
200x200mm
3.66 lb - 1.65 kg
66.6 lb - 30 kg
Black



S/226 ALL-STEEL SPOT MONITOR / AMP STAND

- Designed to hold spot monitors and instrument amplifiers at ear level or lower.
- Accommodates all kinds of mounting bracket configurations including 1" (25 mm) diameter cups, standard mic stand thread with 1/4" and 3/8" connections
- Non-strip-out height adjustment and leg joint collar hardware
- Strong lightweight, portable design
- 90 lb (40.7 kg) weight capacity
- Maximum height of 5 ft. (150 cm)
- Baked-on black enamel finish



The S/226 is supplied with both a 1/4" and a 3/8" standard mic stand thread connection

S/226

- All-Steel Spot Monitor / Amp Stand

Min. to max. height range: 36" to 59"
91.4 to 150 cm
Center tube diameter: 1" - 25 mm
Folded height: 36" - 91.4 cm
Weight capacity: 90 lb - 40.7 kg
Weight: 7.1 lb - 3.2 kg
Color: Black



SB/202

- Twin-Speaker Crossbar with 1-3/8" (35 mm) Connections

Weight capacity*: 150 lb - 67 kg
Width: 19" - 48.5 cm
Color: Black

*(Default to weight limit of stand used)

S/213

- Double ended fixed length extension tube for connection of satellite systems
- All-steel construction

Length: 31.5" - 80 cm
Center tube diameter: 1.375" - 35 mm
Weight: 4.4 lb - 2 kg
Color: Black



S/203

- Telescopic, double ended variable length extension tube for connection of satellite systems
- Allows for the most ideal separation of subwoofer and speaker
- All-steel construction with locking pin to prevent accident descent and vibration

Height range: 28.7" to 44"
73 to 112 cm
Center tube diameter: 1.375" - 35 mm
Weight: 5.5 lb - 2.5 kg
Color: Black



S/203 extension tube in application

SC/3525

- Steel adaptor for mounting 25mm speakers cups on 35mm stand tubing



SC/107

- Steel speaker cup - 35mm (1-3/8") diameter tube mounting hole



SC/235

- Aluminium speaker cup - 35mm (1-3/8") diameter tube mounting hole



SC/217

- Speaker plastic flange adaptor - 35mm diameter tube mounting hole



SC/218

- Speaker plastic flange adaptor - 38mm diameter tube mounting hole



S/230

- Speaker plastic flange adaptor with 25mm diameter tube mounting hole



S/195

- Steel Crossbar for 8 Lights / Effects - 39" (100 cm)



| | |
|-------------------|-----------------|
| Width: | 39.3" - 100 cm |
| Tube size: | 35 mm |
| Weight capacity*: | 125 lb - 56 kg |
| Weight: | 2.8 lb - 1.3 kg |
| Color: | Black |

*[Default to weight limit of stand used]

S/191-1.5

- Aluminum crossbar - 5 ft (150 cm)
- Holds 8 par cans or effects up to 125 lb - 56 kg
- Made of strong aluminum tubing
- Comes complete with light mounting hardware
- 1.5" - 38 mm heavy duty, aluminum-alloy "T" connector




| | |
|-------------------|-----------------|
| Width: | 5' - 150 cm |
| Tube size: | 1.5" - 38 mm |
| Weight capacity*: | 125 lb - 56 kg |
| Color: | Black or Silver |

*[Default to weight limit of stand used]

STS/14

- Aluminum truss system with 10 ft (300 cm) ladder trussing (ladder mounting kit included).

| | |
|---------------------------|---|
| Min. to max height range: | 63.8" to 128" 162 to 325 cm |
| Width: | 10 ft - 300 cm |
| Weight capacity: | 222 lb - 100 kg (evenly distributed) |
| Color: | Black |

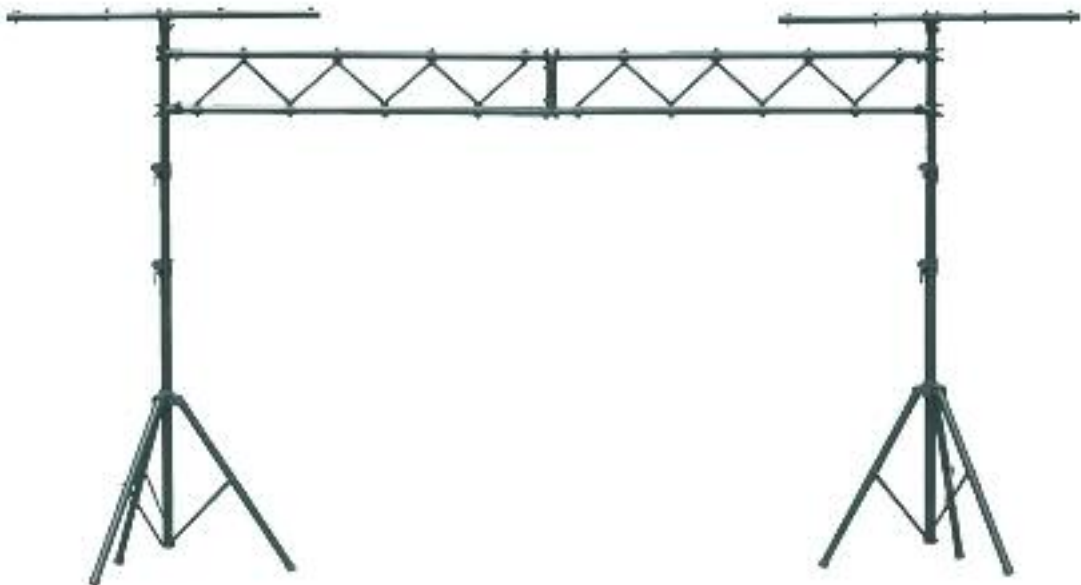

SLS/15

- 13 ft. Heavy-Duty, Steel Crank-Up Lighting / Truss Stand

Min. to max. height range: from 68.9" to 158"
from 175 to 400 cm
Base spread diameter: from 45.3" to 66.1"
from 115 to 168 cm
Center tube diameter: 1-3/8" - 35 mm
Folded height: 68.8" - 135 cm
Weight capacity: 189 lb - 85 kg
Weight: 55.5 lb - 25 kg



Typical lighting system consisting of:
nr. 2 SLS/15 crank-up stands
nr. 2 S/191 crossbars
nr. 1 QT/2150 ladder trussing



QT/2150

- 10 ft (300 cm) Steel ladder trussing
- Consisting of two 5 ft (150 cm) interconnecting sections
- Ladder mounting kit included.

Total length: 10 ft - 300 cm
Color: Black




QCC/1

- Snap-on cable management Clip, designed to help manage the tangle of extension cords, A/C lines and control wires
- Mounts to any 1-3/8" (35 mm) or 1-1/2" (38 mm) tubing
- Can be bolted or riveted into place



QT/3200 RAPID SETUP ALUMINIUM TRIANGLE TRUSSING SERIES

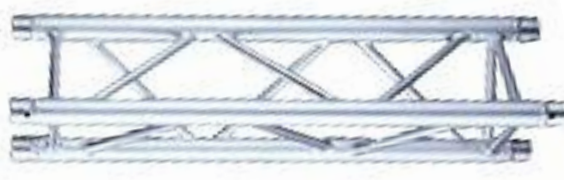

QT/3200

- Aluminium triangle trussing

| | |
|---------------------------------------|------------------|
| Trussing length: | 6.6' - 2 mt |
| Side height: | 11.41" - 29 cm |
| Weight capacity (evenly distributed): | |
| 1 truss section: | 666 lb - 300 kg |
| 2 joint truss sections: | 444 lb - 200 kg |
| 3 joint truss sections: | 333 lb - 150 kg |
| 4 joint truss sections: | 166.5 lb - 75 kg |
| Color: | Silver |



QT/3200-T2

- Set of 2 universal truss mounts for all types triangle or box truss
- Used to mount triangle or box truss on to any lighting stand with 1-3/8" (35 mm) male connection
- Heavy-duty steel construction
- Supplied with steel safety pins to secure truss section in place

| | |
|-----------------------|-----------------|
| Clamps depth opening: | 2.24" - 57 mm |
| Clamps spacing range: | 4.72" to 14.1" |
| | 12 to 36 cm |
| Weight capacity: | 666 lb - 300 kg |
| Color: | Silver |



QT/3200 PARTS KIT

- Connection kit for use with QT/3200 aluminium triangle trussing
- Required to join two triangle truss sections together
- The kit includes:
 - 3 solid steel spigots
 - 6 steel locking pins
 - 6 steel safety springs

One of the many truss system configurations possible with the QT/3200 Triangle Trussing Series:

- 20-foot (6 meter) aluminium triangle truss system
- Components used:
 - Nr. 3 aluminium triangle truss sections model QT/3200
 - Nr. 2 connection kits for triangle truss sections model QT/3200 PARTS KIT
 - Nr. 1 set of 2 universal truss mounts model QT/3200-T2
 - Nr. 2 heavy-duty steel crank-up truss stands model SLS/15
- Max load capacity is 333 lb (150 kg) evenly distributed along the length of the truss sections



QLC/1U

- Universal "C" Clamp
- Universal par can / light effect clamp that can be mounted on any size tubing 1" to 2" (25 to 50 mm) diameter
- Made out of heavy gauge steel
- Tighten clamp onto truss by hand
- No wrenches needed

